

+
- **DRY**

TERMINAL

Front



Side



Top



3D



FEATURES

- LEAD ACID DRY CHARGED CONSTRUCTION
- NO ACID IN CELLS BEFORE ACTIVATION
- NEED TO BE FILLED BEFORE FIRST USE
- HAS TO BE CHECKED PERIODICALLY AND REFILLED IF NECESSARY
- UPRIGHT INSTALLATION ONLY
- 6V & 12V BATTERIES
- REGULAR LIFE DURATION
- DOESN'T NEED TO BE RECHARGED DURING SHELF LIFE

SPECIFICATION

VOLTAGE

12v

CAPACITY (20h)

21.1Ah

CCA (EN)



260A

CAPACITY (10h)

20.0Ah

DIMENSIONS & WEIGHT

LENGTH	205±2mm
WIDTH	90±2mm
TOTAL HEIGHT	162±2mm
GROSS WEIGHT	6.61kg

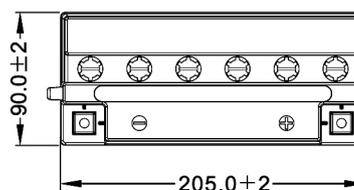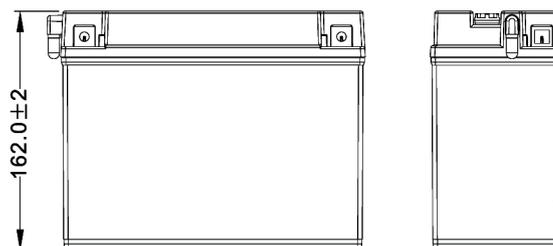

POLARITY



MOUNTING ANGLES

