



DRY

TERMINAL

Front



Side



Top



3D



FEATURES

- LEAD ACID DRY CHARGED CONSTRUCTION
- NO ACID IN CELLS BEFORE ACTIVATION
- NEED TO BE FILLED BEFORE FIRST USE
- HAS TO BE CHECKED PERIODICALLY AND REFILLED IF NECESSARY
- UPRIGHT INSTALLATION ONLY
- 6V & 12V BATTERIES
- REGULAR LIFE DURATION
- DOESN'T NEED TO BE RECHARGED DURING SHELF LIFE

SPECIFICATION

VOLTAGE

12v

CCA (EN)

175A

CAPACITY (20h)


14.7Ah

CAPACITY (10h)


14.0Ah

DIMENSIONS & WEIGHT

LENGTH	134±2mm
WIDTH	89±2mm
TOTAL HEIGHT	176±2mm
GROSS WEIGHT	4.43kg

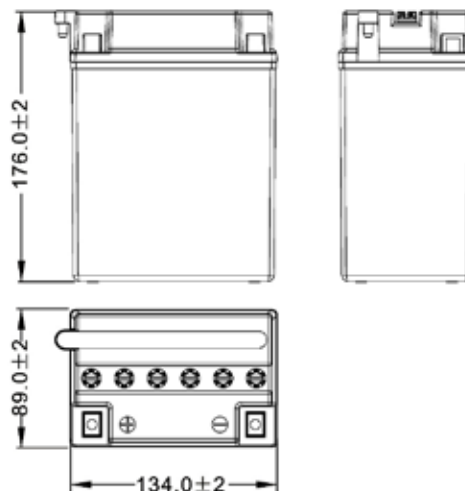

POLARITY



MOUNTING ANGLES

